


CHANGE IN DIRECTION

N.T.S.

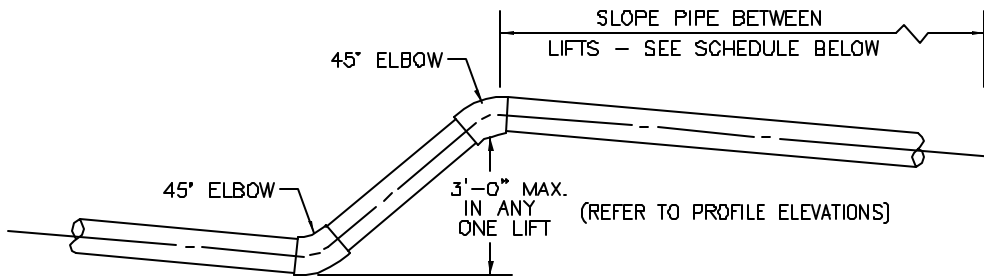

SLOPE SCHEDULE		
PIPE DIAMETER	MINIMUM FALL	0.2% OF DISTANCE
3"	0.20 FT	0.2% 100 FT ▲
4"	0.25 FT	0.2% 125 FT ▲
6"	0.25 FT	0.2% 125 FT ▲
8"	0.25 FT	0.2% 125 FT ▲
10"	0.25 FT	0.2% 125 FT ▲

USE WHICHEVER SLOPE IS GREATER BETWEEN LIFTS. ABOVE THIS LENGTH IN DISTANCE, THE 0.2% SLOPE IS GREATER. ANYTHING SHORTER THAN THIS DISTANCE SHOULD USE MINIMUM FALL INDICATED. WHEN NOT BETWEEN TWO LIFTS, USE 0.2% SLOPE.

LIFT DETAIL AND SLOPE SCHEDULE

N.T.S.